


# Contact Adhesive

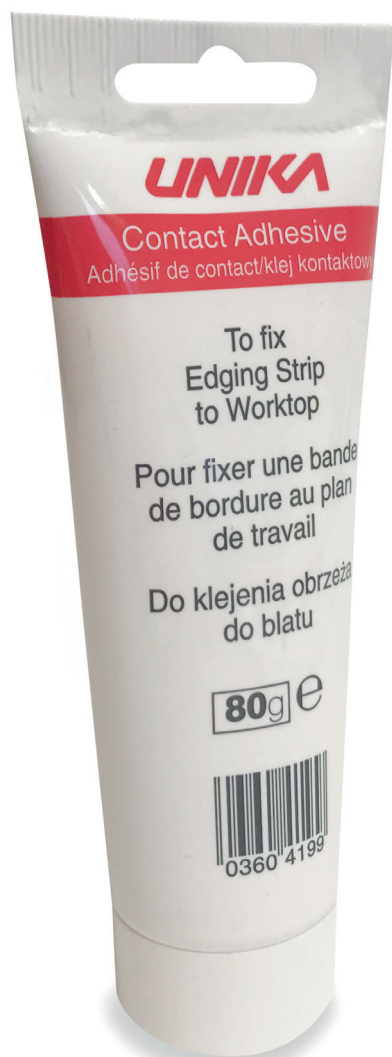

## Key Features:

Contact Adhesive is perfect for fixing laminate edging strip to chipboard/ MDF core laminate worktops.

The formation of an instant bond makes it suitable for use on vertical surfaces.

Easy to apply and also gives good adhesion on materials such as plasterboard, hardboard and steel.

Drying time is dependent upon the ambient temperature/humidity. It can be accelerated by the use of warm air over the adhesive.

Coverage of 80g tube is enough to bond half a square metre.

Clean up with water.

- Allow the adhesive to become touch dry before bringing the two surfaces together.
- Start at one end of the strip and apply pressure towards the other end making sure that no air is trapped and good contact is made over the whole length.
- Clean up immediately using cold water.
- Storage – Store at temperatures between 5°C and 3°C. Protect from frost.

## Consumer Benefits:

Quick and easy to use.

Contact Adhesive creates an instant bond, so it is ideal for laminate end strips that are difficult to clamp in place.

## Directions for Use:

- Using a small paint brush coat an even application of adhesive to fully cover the cut edge of the worktop and also the back of the laminate edging strip.

## Retailer Opportunity:

Sell alongside laminate end strips.

## UNIKA COLOR PRODUCTS LTD

Unika House, New York Way, New York Industrial Park,  
Newcastle upon Tyne, U.K. NE27 0QF

Telephone: +44 (0) 191 259 0033

Fax: +44 (0) 191 257 4525

Email: sales@unika.co.uk www.unika.co.uk



The mark of responsible forestry

