

# PHOENIX

Profil



Plus




Utilisation



Source



Alimentation





Finition



## Caractéristiques produit

- Transformateur intégré
- Matériel: aluminium
- Installation: fixation miroir et cadre

## Plan technique

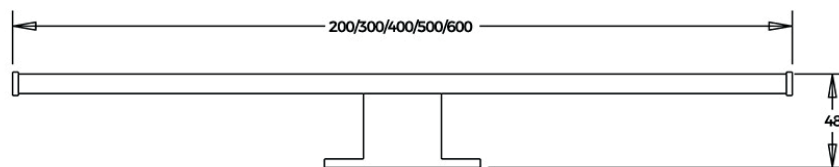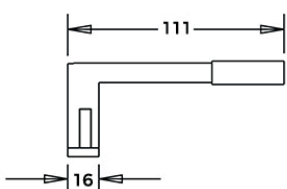

## SPECIFICATIONS

CODE	DIMENSIONS (mm)	VOLT	WATT	LUMEN	COLOUR
SL-3510/20/6K	200 x 48 x 111	220-240	3	300	6000° K
SL-3510/20/4K	200 x 48 x 111	220-240	3	300	4000° K
SL-3510/30/6K	300 x 48 x 111	220-240	4	400	6000° K
SL-3510/30/4K	300 x 48 x 111	220-240	4	400	4000° K
SL-3510/40/6K	400 x 48 x 111	220-240	5	500	6000° K
SL-3510/40/4K	400 x 48 x 111	220-240	5	500	4000° K
SL-3510/50/6K	500 x 48 x 111	220-240	5,5	550	6000° K
SL-3510/50/4K	500 x 48 x 111	220-240	5,5	550	4000° K
SL-3510/60/6K	600 x 48 x 111	220-240	6	600	6000° K
SL-3510/60/4K	600 x 48 x 111	220-240	6	600	4000° K

# PHOENIX

Profil



Plus




Utilisation



Source



Alimentation




Finition



## Caractéristiques produit

- Transformateur intégré
- Matériel: aluminium
- Installation: fixation miroir et cadre

## Plan technique

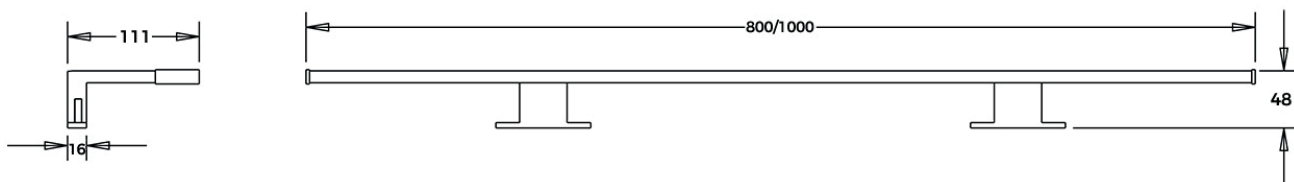

## SPECIFICATIONS

CODE	DIMENSIONS (mm)	VOLT	WATT	LUMEN	COLOUR
SL-3510/80/6K	800 x 48 x 111	220-240	9	900	6000° K
SL-3510/80/4K	800 x 48 x 111	220-240	9	900	4000° K
SL-3510/100/6K	1000 x 48 x 111	220-240	10	1000	6000° K
SL-3510/100/4K	1000 x 48 x 111	220-240	10	1000	4000° K